

SOKKIA

Series 10K

SET210K · SET310K · SET510K · SET610K

Total Stations
with illuminated alphanumeric keypad



SUPERIOR DURABILITY AND TOP PERFORMANCE—THE NEW GENERATION STANDARD TOTAL STATIONS



The photo depicts a Series10K with optional CF card unit.

Series 10K

SET210K · SET310K

SET510K · SET610K



Series10K total stations are equipped with a backlit alphanumeric keypad plus an extra-wide LCD screen to deliver smooth operation. Featuring Sokkia's original absolute encoders, rugged construction with IP66 water and dust resistance, a wide variety of surveying programs and more, this tough, versatile surveying partner offers solutions for all your surveying tasks.

■ User-friendly 10-key alphanumeric keypad plus softkeys

The control panel features a 10-key alphanumeric keypad for convenient manual data input. For further productivity and ease of use, the control panel also includes four softkeys (F1 - F4) that you can customize to perform functions of your choice. What's more, all keys are backlit and glow brightly, so you can see exactly what you are doing—even when working in low light conditions.

Extra-wide screen

Never lose sight of your project. Series10K's high-density screen (192 x 80 pixels) provides optimum data visibility in a variety of temperatures.



■ SF14 wireless keyboard



The SF14 wireless keyboard has a total of 37 keys (including alphanumeric keys, softkeys, and measurement controls), to enable quick and easy data entry of point names and coordinate values. Protection against dust and water is another advantage, as you can use the keyboard without worry in the rain or at a dusty construction site. (IP44 compliant)

SF14 is an optional accessory for SET210K/310K/510K.

■ Versatile and reliable EDM

A high accuracy of $\pm(2 + 2 \text{ ppm} \times D)$ mm is achieved using glass prisms in fine-continuous measurement mode measuring distance every 1.6 seconds. With rapid measurement mode, distance is measured every 0.8 seconds, and tracking mode updates distance data every 0.3 seconds.

Wide variety of reflective sheet targets for more versatility in the field

Sokkia offers a full lineup of reflective sheet targets, including adhesive sheet type, rotating type with pin-poles, rotating type for tribrachs, 2-point targets for hidden points and reflective staves for cross-sectional surveying.



■ Compact Lithium Ion battery


Take 7.5 hours of continuous angle and distance measurements with Series10K's rechargeable Lithium Ion battery. Unlike Ni-Cd cells, Series10K's Li-Ion batteries can be fully recharged at anytime, without diminishing the batteries' energy capacity. BDC46A battery is commonly used for Sokkia's digital levels, etc.



A wide variety of functions provide increased operational efficiency




Missing Line Measurement (MLM)

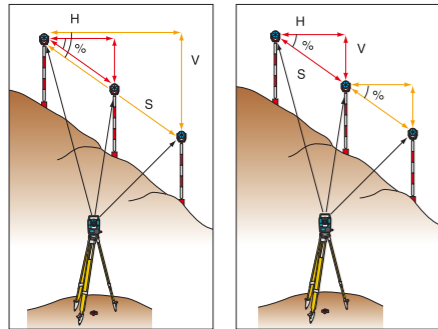


At the touch of a key, the Series10K measures horizontal distance, slope distance, height difference and percentage of slope between two prisms.

Remote Elevation Measurement (REM)

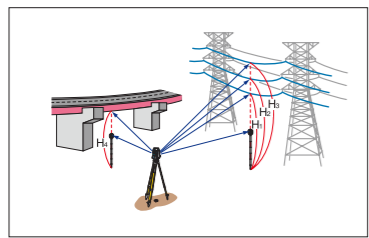


The Series10K easily determines the height of a point where a prism cannot be placed. Sight a prism either directly above or directly below the target point, and then sight the target point.

3-D Coordinate Measurement

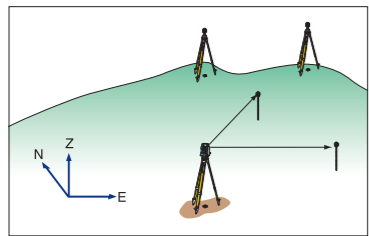

The Series10K calculates 3-D coordinate values of measuring points and displays them either as N,E,Z or E,N,Z.


Automatic Azimuth Angle Setting

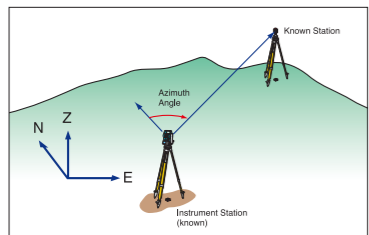

The Series10K can automatically set the horizontal angle to the azimuth of a back sight by using the coordinates of the instrument station and the back sight point.


Resection

The Series10K can determine the azimuth and coordinates of an unknown instrument station with 2 to 10 known points. When using two points, measure both angles and distances.

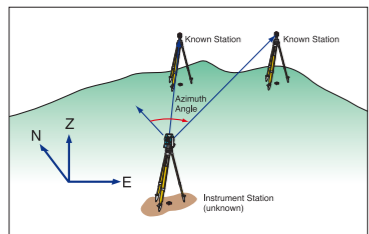


When using three or more points, the distance is not required. Station elevation from known reference points (up to 10 points) can also be calculated and each deviation of multiple reference points is displayed. If a bad point is selected it can be recalculated, re-observed or replaced with a new point.

Offset/Distance

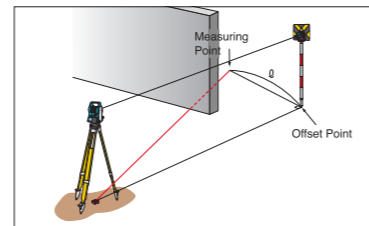

The Series10K calculates the angles and distance, or the coordinates of the measuring point by inputting the distance and direction between the measuring point and the offset prism.


Offset/Angle

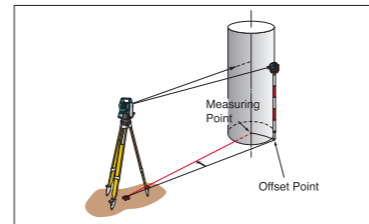

The Series10K automatically calculates the position of measuring points. First, set the prism on either side of the measuring point at the same distance from the Series10K instrument. Measure the prism, then sight the measuring point.


Two-Distance Offset

With the use of a 2RT500-K 2-point target, the Series10K can measure hidden points easily and efficiently. Set the two-point target on the measuring point (the target does not have to be perpendicular), measure targets A and B, and input the length between target B and the measuring point.

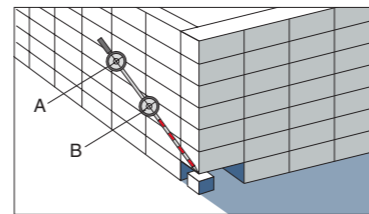

The Series10K calculates the position of the measuring point in angles and distance, or in coordinate values.

Setting Out

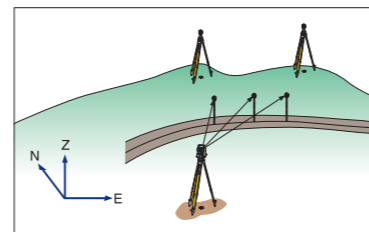


The Series10K performs three-dimensional setting out with N, E and Z or E, N and Z coordinates. Directions and distances to the setting out position are indicated on the screen.

Set-out Line

The Set-out line program is used for setting out and checking the alignment of curb lines, construction boards and grades of pipes. A baseline or an offset from a baseline can be defined. When calculating the measuring point, it's possible to calculate and use the scaled down coefficient of the distance and surveyed value that was calculated using the known coordinate values of 2 points.

Point Projection


This program projects a point onto a line. It calculates the distance and offset of the point relative to the specified baseline, and it computes the coordinates of the intersection point, which can then be directly set out. Elevations are interpolated where possible.

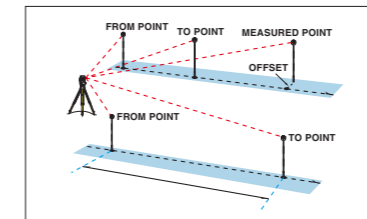


When calculating the measuring point, it's possible to calculate and use the scaled down coefficient of the distance and surveyed value that was calculated using the known coordinate values of 2 points.

Illustration of Set-out Line and Point Projection.

Area Calculation

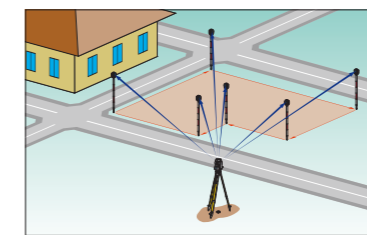

The Series10K can use measured points or stored data—up to 50 points in total—to calculate an area. Area calculations are made with 3D coordinates, so even sloped surfaces can be measured with ease and precision.

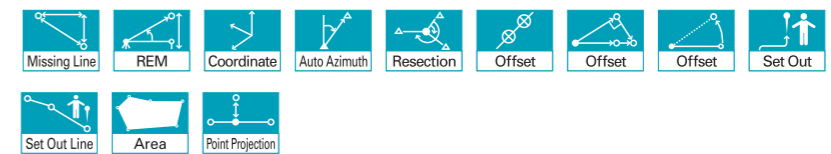

SDR Series Data Collectors (Optional)

Sokkia's extremely popular SDR series data collectors can be fully utilized through the 2-way communication capability of the Series10K instruments. Highly sophisticated programs such as Topography, Traverse Adjustment, Building Face Survey, various types of Setting Out measurement, Road measurement and more are available through combined use of the Series10K and SDR data collectors.

Standard Accessories

BDC46A rechargeable battery: 2 pcs. (SET610K: 1 pc.) • CDC68 quick charger with EDC113A/113B/113C power cable • CP7 tubular compass • Lens hood • Lens cap • Plumb bob • Tool kit • Operator's manual • Carrying case and shoulder strap

Optional Accessories

SF14 wireless keyboard* • CF card unit* (factory option) • BDC57 external Ni-MH battery (low-temperature compatible)*, EDC3A power cable for BDC57 (2m, low-temperature compatible)*, EDC7A power cable for BDC57 (0.5m, low-temperature compatible)*, CDC14 battery charger for BDC57* • EDC2A AC power adapter (100 to 240V)* • EDC14 external battery adapter*, EDC5 car battery cable for EDC14*, EDC4 car cigarette lighter cable for EDC14* • OF3A solar filter • DE25 diagonal eyepiece • EL7 eyepiece (40x)* • EL6 eyepiece for SET610K (30x) • DOC46 printer cable • DOC25 (25 pins, male), DOC26 (25 pins, female), DOC 27 (9 pins, female), DOC1 (w/o connector) interface cables • LAP1 laser plummet • ACE5 auto-collimation eyepiece • SC189 back pack • 20" / 2mm plate level for SET210K (factory option)

* SET210K/310K/510K only.

For more information, please consult your local Sokkia sales representative.



■ Sokkia's original absolute encoders

The Series10K total stations are loaded with absolute encoders that employ the RAB code (RANdom Bi-directional code) which was originally developed for digital levels. Through the use of advanced signal processing, stable and reliable angle measurement data can be obtained. As there is no need to reset the total station for 0 indexing at the start of surveying, measurement can be started as soon as the power is turned on.

■ Triple-axis compensation for dependable angle measurement

The dual-axis compensator monitors instrument tilt in two directions and corrects both vertical and horizontal angle values. The collimation function corrects the deviations of the telescope's mechanical axis.

■ Large internal memory

The Series10K can store approximately 10,000 data points, including known points and other information. To facilitate concurrent use at different work sites, data may be sorted into 10 different job files.

■ CompactFlash card unit

A card unit for commercially available CompactFlash memory cards can be added as a factory option.



576,000 points (114 files, each holding 4,000 points) can be stored with a 64MB memory card. Cards up to 512MB are supported.

CompactFlash card unit is a factory option for SET210K/310K/510K.


■ Highest Level of Robustness



The Series10K complies with IEC (International Electrotechnical Commission) environmental standard IP66 (IEC 60529). The first digit following IP indicates the level of protection against the ingress of solid foreign objects, of which 6 is the highest grade—dust-tight, meaning no dust can enter the unit. The second digit indicates the level of protection against the ingress of water. Grade 6 indicates protection against powerful water jets from any direction.

■ Enhanced security

A password-protection function is included for security purposes. You can assign your own password to the instrument to prevent unauthorized use.

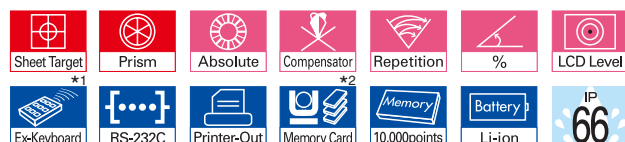

The International Electrotechnical Commission standard IEC 60529 describes a system for classifying degrees of protection provided by enclosures of electrical equipment. The IP Code consists of the letters IP and two numerals. Larger numbers represent greater levels of protection.



*1 SET210K • SET310K • SET510K (Optional)

*2 SET210K • SET310K • SET510K (Factory option)

Series 10K SET210K · SET310K · SET510K · SET610K


SPECIFICATIONS

Total Stations

	SET210K	SET310K	SET510K	SET610K
Telescope	Fully transiting, coaxial sighting and distance measuring optics			
Length	170mm (6.7in.)			
Objective aperture	45 mm (1.8 in.) [EDM: 48 mm (1.9 in.)]			
Magnification	30 x			26 x
Image	Erect			
Resolving power	3"			3.5"
Field of view	1°30' (26 m/1,000 m)			
Minimum focus	1.0m (3.3 ft.)			
Reticle illumination	Built-in. 5 brightness levels			
Angle measurement	Photoelectrical absolute rotary encoder scanning. Both circles adopt diametrical detection			
Unit	H&V	Degree / Gon / Mil, selectable		
Display resolutions	H&V	1' / 5', 0.2mgon / 1mgon, 0.005 mil / 0.02 mil, selectable		
Accuracy (ISO17123-3:2001)	H&V	2' (0.6mgon) (0.010mil)	3' (1 mgon) (0.015mil)	5' (1.5 mgon) (0.025mil) 6' (1.9 mgon) (0.030mil)
Measuring time	Less than 0.5s, continuous			
Measurement mode	H	Clockwise / Counterclockwise, selectable ; 0 set, Hold, angle setting, repetition, available		
	V	Zenith 0°, Horizontal 0°, Horizontal 0° ±90°, slope in % , selectable		
Automatic dual-axis compensator	ON (V&H, V only) / OFF selectable			
	Type	Dual-axis liquid tilt sensor		
	Range	±3' (±55 mgon), * out-of-range * warning display provided		
	Display resolution	According to display resolution		
Collimation program	Yes / No, selectable			
Fine motion screws	Fine/Coarse two-speed motion		One-speed motion	
Distance measurement	Modulated near infrared light (IEC Class 1 LED)			
Measuring range (slope distance)	A: Average conditions: slight haze, visibility about 20 km (12 miles), sunny periods, weak scintillation G: Good conditions: no haze, visibility about 40 km (25 miles), overcast, no scintillation			
	With RS90N-K reflective sheet target	A	2 to 120m (390ft.)	
	With CP01 compact prism	A	1 to 800m (2,620ft.)	
	With one AP01 prism	A	1 to 2,400m (7,870ft.)	
		G	1 to 2,700m (8,850ft.)	
	With three AP01 prisms	A	1 to 3,100m (10,160ft.)	
		G	1 to 3,500m (11,480ft.)	
		G	1 to 3,500m (11,480ft.)	
Accuracy (D=measuring distance; unit: mm)	With prism	Fine meas.	± (2 + 2ppm x D) mm	
		Rapid meas.	± (5 + 5ppm x D) mm	
	With reflective sheet target*1	Fine meas.	± (4 + 3ppm x D) mm	
		Rapid meas.	± (5 + 5ppm x D) mm	
Unit	Meters / Feet / Inch, selectable			
Display resolution	Fine meas.	0.001 m (0.01 ft. / 1/8 inch)		
	Rapid meas.	0.001 m (0.01 ft. / 1/8 inch)		
	Tracking meas.	0.01 m (0.1 ft. / 1/2 inch)		
Measuring time	Fine meas.	Every 1.6s (initial meas. 2.8s)		
	Rapid meas.	Every 0.8s (initial meas. 2.3s)		
	Tracking meas.	Every 0.3s (initial meas. 1.8s)		
Measurement mode	Fine meas. (single/repeat/average) / Rapid meas. (single/repeat) / Tracking, selectable			
Atmospheric correction	(1) Temperature / pressure input, (2) ppm input, (3) w/o compensation, selectable			
Prism constant correction	-99 to +99 mm (1 mm steps)			
Refraction & earth-curvature correction	Yes (K=0.142 / K=0.20) / No, selectable			
Scale factor setting	0.5 to 2.0			
Sea Level Correction	Yes / No, selectable			
Data storage and transfer				
Data storage	Internal memory	About 10,000 points		
	CompactFlash card unit *2	Optional	n/a	
Interface	Asynchronous serial, RS-232C compatible, baud rate : 1,200 to 38,400 bps			
Printer output	Centronics compatible (w/optional DOC46 printer cable)			
General				
Display	Alphanumeric/graphic dot matrix LCD (192 x 80 dots) w/backlight, on both faces			Alphanumeric/graphic dot matrix LCD (192 x 80 dots) w/backlight, on one face
Keyboard	4 softkeys and 23 keys on both faces			
Wireless keyboard	Optional			
				4 softkeys and 23 keys on one face
Sensitivity of levels	Plate level	30" / 2 mm*3	30" / 2 mm	40" / 2 mm
	Circular level (in tribrach)	10' / 2 mm		
	Graphic LCD level	3' / outer circle		
Optical plummet	Image: Erect, Magnification: 3x, Minimum focus: 0.3 m (0.98 ft.)			
Water and dust resistance	Conforms to class IP66 (IEC60529)			
Operating temperature	-20 to +50° C (-4 to +122° F)			
Tilting / Trunnion axis height	236mm (9.3in.) from tribrach bottom			
Size with handle and battery	W 165 x D 180 x H 341 mm (W 6.5 x D 7.1 x H 13.5 in.)			W 165 x D 173 x H 341 mm (W 6.5 x D 6.8 x H 13.5 in.)
Weight with handle and battery	5.2 kg (11.5 lb.)			5.1 kg (11.2 lb.)
Power supply	7.2V DC			
BDC46A Li-Ion detachable battery	Angle & distance continuous use*4: About 7.5 hours (About 900 points), Angle measurement only: About 10 hours Recharging time with standard quick charger: Less than 2 hours			
BDC57 external Ni-MH battery (optional)	Angle & distance continuous use*4: About 34 hours, Angle measurement only: About 40 hours			n/a
Battery level display	4 steps with warning message			
Automatic power cut-off	30 / 15 / 10 / 5 minutes after operation / OFF, selectable			
Resume function	ON / OFF selectable (backed up for about 1 week)			

*1 When the beam's incident angle is within ±30° up and down / right and left in relation to the surface of the target.
*2 CompactFlash card not included. 576,000 points (114 files, each holding 4,000 points) can be stored with an 64MB memory card.
*3 20" / 2 mm plate level is available as a factory option. *4 Fine & single measurement every 30s at 25°C (77°F).

Sokkia is a trademark of Sokkia Co., Ltd. Product names mentioned in this brochure are trademarks of their respective owners. Designs and specifications are subject to change without notice. Product colors in this brochure may vary slightly from those of the actual products owing to the limitations of the printing process.

 Sokkia is a sponsor of the International Federation of Surveyors

SOKKIA CO., LTD. Head Office, Japan Phone +81-46-248-7984 www.sokkia.co.jp ISO9001 Certified (JQA-0557)

SOKKIA CORPORATION Head Office U.S.A. Phone +1-913-492-4900 www.sokkia.com

SOKKIA CORPORATION Head Office Canada Phone +1-905-238-5810 www.sokkia.com

SOKKIA LATIN AMERICA Head Office Latin America Phone +1-305-599-4701 www.sokkia.com

SOKKIA PTY. LTD. Head Office Australia, New Zealand and South Pacific Phone +61-2-9638-2400 www.sokkia.com.au

SOKKIA B.V. Head Office Europe & other CIS countries Phone +31-(0)36-5496000 www.sokkia.net

SOKKIA KOREA CO., LTD. Head Office Republic of Korea Phone +82-2-514-0491 www.sokkia.co.kr

SOKKIA SINGAPORE PTE. LTD. Head Office South & Southeast Asia, Middle East, and Africa Phone +65-6479-3966 www.sokkia.com.sg

SOKKIA SURVEYING INSTRUMENTS TRADING (SHANGHAI) CO., LTD. Shanghai Office, People's Republic of China Phone +86-21-63541844 www.sokkia.com.cn

SOKKIA SURVEYING INSTRUMENTS TRADING (SHANGHAI) CO., LTD. Beijing Office People's Republic of China Phone +86-10-65056066 www.sokkia.com.cn

A-239-E-2-0610-CH-AB Printed in Japan on 100% recycled paper with ecologically safe soy ink.

© 2006 SOKKIA CO., LTD.